



FEATURES & SPECIFICATIONS

Rated Line Pull:13000LB(5897kg) single-line

Motor:6.2hp/4.6kw 12V, Series Wound motor

Gear Train: 3-stage planetary

Gear Reduction Ratio:265:1

Clutch:Up and down 90°

Cable:φ9.5mm×27m

Drum Size:φ64mm×224mm

Overall Dimensions: (L×W×H)20.7"×6.4"×8.1"
(527×163×205mm)

Gross Weight(cable winch):89 lbs(40kg)

Gross Weight(ropc winch):75.0lbs(34.0kg)

Duty Cycle:Intermittently

Fairlead:4-way roller fairlead or aluminium fairlead

Package:1pc/box, 600mm×245mm×370mm

Mounting Bolt Pattern:10"×4.5"(254×114.3mm)

Remote Control:Included


LINE Speed & Amp Draw-First Layer

Line Pull	Lbs	NO	4000	6000	8000	10000	13000	
	Kgs	LOAD	1814	2721	3630	4536	5897	
Line speed	Ft/min		32.1	22.3	17.7	13.4	11.2	7.9
	M/min		9.8	6.8	5.4	4.1	3.4	2.4
Motor Current	amps		75	195	240	291	335	362

LINE PULL AND Cable Capacity

Layer of cable		1	2	3	4
Rated line	Lbs	13000	10011	9300	8500
Pull per layer	Kgs	5897	4541	4218	3856
Cumulative	Ft	16	39	69	89
Cable capacity	m	5	12	21	27

Mounting Bolt Pattern

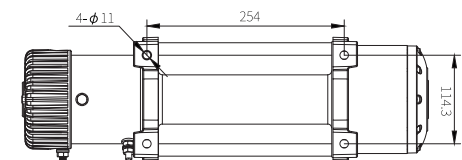

Dimensions

