



FEATURES & SPECIFICATIONS

Rated Line Pull:13500LB(6124kg) single-line
 Motor:6.5hp/4.8kw 12V, Series Wound motor
 Gear Train: 3-stage planetary
 Gear Reduction Ratio:216:1 or 150:1
 Clutch:Up and down 90°
 Cable:φ9.5mm×27m
 Drum Size:φ64mm×224mm
 Overall Dimensions: (L×W×H)22.1"×7.9"×7.9"
 (562mm×200mm×200mm)
 Gross Weight(cable winch):90 lbs(41kg)
 Gross Weight(rope winch):67 lbs(30.3kg)
 Duty Cycle:Intermittently
 Fairlead:4-way roller fairlead or aluminium fairlead
 Package:1pc/box, 660×270×420mm
 Mounting Bolt Pattern:10"×4.5"(254×114.3mm)
 Remote Control:Included


LINE Speed & Amp Draw-First Layer

Line Pull	Lbs	NO	4000	6000	8000	10000	13500
	Kgs	LOAD	1814	2721	3630	4536	6124
Line speed	Ft/min	32.8	23.3	18.0	13.4	11.2	7.5
	M/min	10	7.1	5.5	4.1	3.4	2.3
Motor Current	amps	75	195	240	291	335	375

LINE PULL AND Cable Capacity

Layer of cable		1	2	3	4
Rated line	Lbs	13500	10714	8881	7584
Pull per layer	Kgs	6124	4860	4028	3440
Cumulative	Ft	16	39	69	89
Cable capacity	m	5	12	21	27

Mounting Bolt Pattern

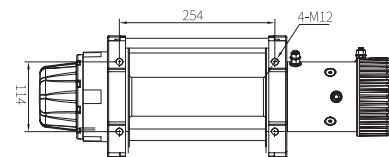

Dimensions

